Numafa
Cleaning & Automation

Numafa, your partner for innovative cleaning solutions.

We develope, manufacture and deliver innovative industrial cleaning solutions for the food and non-food industry since 1977. With offices in the Netherlands and America, we ship to every continent. In addition, we provide full maintenance and service.



Numafa Cleaning & Automation B.V.
+31 (0)186 65 08 50 • info@numafa.com • www.numafa.com
Sikkel 1, 3274 KK Heinenoord, The Netherlands

Your partner for innovative cleaning solutions

Numafa
Cleaning & Automation

Discover the CWM GO

Clean, Smart, Reliable.

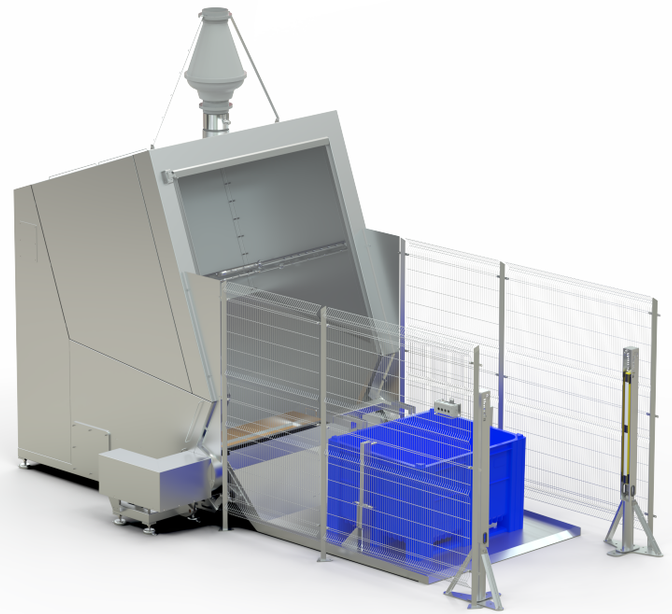

CWM GO

Compact, Efficient, and Fully Automated

The CWM Go is a compact, high-performance container washer designed to make cleaning Dolavs, pallet boxes, and similar containers faster, easier, and more efficient.

With a capacity of up to 25 containers per hour and effortless floor-level loading via an electrically operated tilting door, the CWM Go combines smart design with maximum operator comfort. Versatile and adaptable, the CWM Go can handle Eurobins and Dolavs/pallet boxes with the optional adjustable product holder.

Its advanced washing system — featuring a 650 liter tank and 2 mm filtration — guarantees consistent, high-quality results with every wash.

The closed-loop system ensures that water and heat never go to waste. By continuously recirculating and filtering the water, the CWM Go helps you reduce consumption, cut costs, and operate more sustainably.



- **Outstanding** cleaning performance
- **Low** operating costs
- **Industrial-Grade** durability (15-20 years)
- **Modular** design
- **Easy** to operate & maintain

Your partner for innovative cleaning solutions

Technical Data

Material	Stainless steel 304
Capacity	Up to 25 per hour
Measurements machine (closed)	2.380 x 2.070 x 2.910 mm (LxWxH)
Tank volume	650 liters
Filtration	Sieve plate 2 mm
Electric heating	27 kW (3x9kw) 15-45°C
Work height	Floor level
Product limits	1220 x 1220 x 950 mm (LxWxH)

Options

- Alternative heating (steam injection)
- Vapor extraction
- Extra heating element (50°C)
- Chemical dosing pump
- Adjustable product holder

